


G31-M7 OC Motherboard

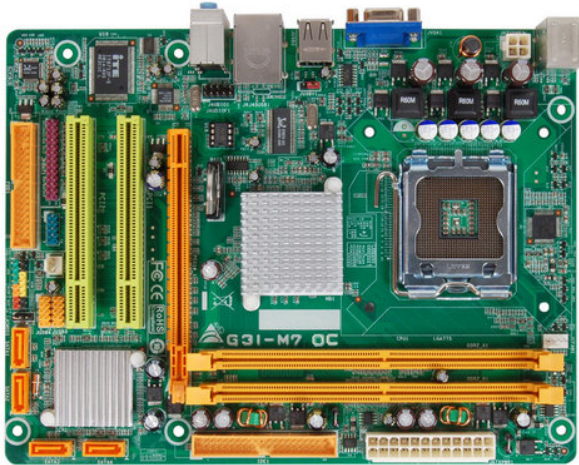

- Socket LGA 775
- Supports Intel Core 2 Quad/Core 2 Duo/Pentium D/Pentium 4/Celeron Dual Core/Celeron 400 Series Processor
- Supports FSB 533/800/1066/1333/1600MHz
- Support Intel Hyper-Threading Technology
- "Magic OC" function should be Enabled in BIOS setting
- CPU FSB frequency will depends on each CPU process tolerance
- Strongly recommend the OC memory types approved on BIOSTAR website
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

G31-M7 OC Specification

CPU SUPPORT	Intel® Core™ 2 Quad Processor Intel® Core™ 2 Duo Processor Intel® Pentium® Dual-Core Processor Intel® Pentium® D Processor Intel® Pentium® 4 Processor Intel® Celeron® Dual-Core Processor Intel® Celeron® D Processor Intel® Celeron® Processor 400 Sequence
FSB	Support FSB 533/800/1066/1333/1600MHz
MEMORY	Support Dual Channel DDR2 533/667/800 MHz 2 x DDR2 DIMM Memory Slot Max. Supports up to 4GB Memory *Support DDR2 533MHz While Using FSB 533/1066 CPU
INTEGRATED VIDEO	Intel Graphics Media Accelerator 3100 On Board Graphic Max. Share Memory 256MB

STORAGE	4 x SATA II Connector 1 x IDE Connector
LAN	Realtek RTL8102EL - 10/100 Controller
AUDIO CODEC	Realtek ALC662 6-Channel HD Audio
USB	4 x USB 2.0 Port 2 x USB 2.0 Header
EXPANSION SLOT	1 x PCI-E x16 Slot 2 x PCI Slot
REAR I/O	1 x PS/2 Mouse 1 x PS/2 Keyboard 4 x USB 2.0 Port 1 x VGA Port 1 x LAN Port 3 x Audio Jacks
INTERNAL I/O	2 x USB 2.0 Header 4 x SATA II Connector (3Gb/s) 1 x IDE Connector 1 x Floppy Connector 1 x Front Audio Header 1 x Front Panel Header 1 x CPU Fan Connector 1 x System Fan Connector 1 x COM Port Header 1 x Printer Port Header
DIMENSION	Micro ATX Form Factor Dimension: 23.5 cm X 17.9 cm (W x L)
OS SUPPORT	Supports Windows 2000 / XP / Vista / 7
ACCESSORIES	2 x SATA Cable 1 x I/O Shield 1 x Fully Setup Driver CD 1 x Quick Guide
FEATURES	Supports Solid capacitor BIO-FLASHER

G31-M7 OC OVERVIEW

***The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!**