


TP43E3 XE Motherboard

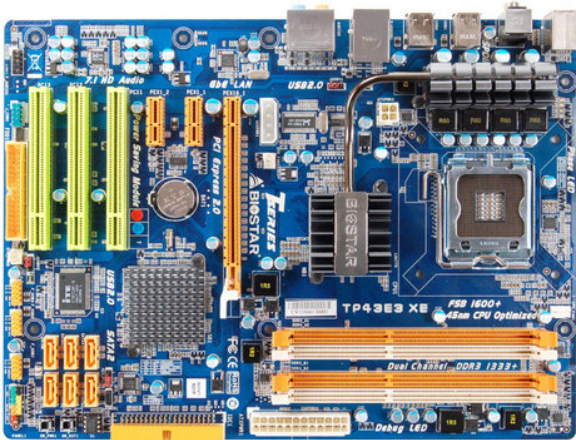

- Intel LGA775 Platform
- Support latest Intel Socket 775 Core 2 Quad/Core 2 Duo Processors
- Support Intel 45nm CPU processors
- Intel P43+ICH10 chipset
- FSB 1600(OC)/1333/1066
- Supported 4 DIMM of DDR3 800/1066/1333/1600(O.C), Max.8G
- BIOSTAR G.P.U (Green Power Utility) Technology
- Solid Capacitors designed in CPU VRM area

TP43E3 XE Specifcation

CPU SUPPORT	Intel® Core™ 2 Extreme Processor Intel® Core™ 2 Quad Processor Intel® Core™ 2 Duo Processor Intel® Pentium® Dual-Core Processor Intel® Celeron® Dual-Core Processor Intel® Celeron® Processor 400 Sequence Maximum CPU TDP (Thermal Design Power) : 136Watt
FSB	Support FSB 800/1066/1333/1600(OC)MHz
MEMORY	Support Dual Channel DDR3 800/1066/1333/1600(OC) MHz 4 x DDR3 DIMM Memory Slot Max. Supports up to 8GB Memory ※FSB800 CPU only support DDR3-800 • ※FSB1066 CPU only support DDR3-800/1066
STORAGE	6 x SATA II Connector 1 x IDE Connector
LAN	Realtek RTL8111DL - 10/100/1000 Controller
AUDIO CODEC	Realtek ALC888 8+2 Channel HD Audio

USB	6 x USB 2.0 Port 3 x USB 2.0 Header
EXPANSION SLOT	1 x PCI-E 2.0 x16 Slot 2 x PCI-E x1 Slot 3 x PCI Slot
REAR I/O	1 x PS/2 Mouse 1 x PS/2 Keyboard 6 x USB 2.0 Port 1 x LAN Port 6 x Audio Jacks 1 x S/PDIF Out Port
INTERNAL I/O	3 x USB 2.0 Header 6 x SATA II Connector (3Gb/s) 1 x IDE Connector 1 x Floppy Connector 1 x Front Audio Header 1 x Front Panel Header 1 x S/PDIF-Out Header 1 x CPU Fan Connector 2 x System Fan Connector 1 x COM Port Header
DIMENSION	ATX Form Factor Dimension: 30.5 cm X 22 cm (W x L)
OS SUPPORT	Supports Windows 2000 / XP / Vista / 7
ACCESSORIES	1 x IDE Cable 2 x SATA Cable 1 x SATA Power Cable 1 x I/O Shield 1 x Fully Setup Driver CD 1 x User Manual
FEATURES	Windows 7 Compatible Supports 100% Solid capacitor Tweak Tech Supports Clean-Tone Supports O.N.E Supports Rapid Switch Supports Rapid Debug BIO-FLASHER Supports GPU
TP43E3 XE OVERVIEW	
*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!	