


## A770E3 Motherboard

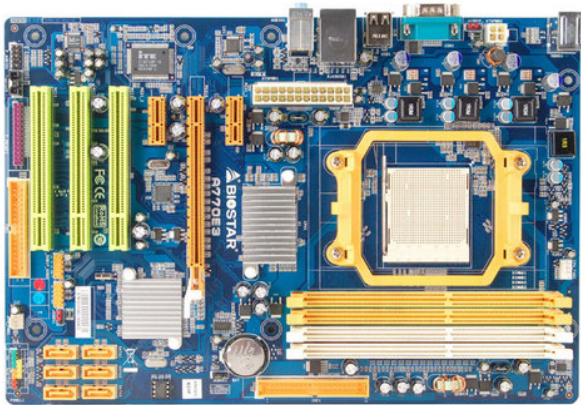

- Socket AM3
- Supports AMD Phenom II Series/Athlon II Series Processors
- Hyper Transport Technology up to 5.2G
- Supports AMD Cool'n'Quiet Technology
- **AMD OverDrive™ with ACC feature (Advanced Clock Calibration) supported**
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

## A770E3 Specification

CPU SUPPORT	AMD Phenom™ II X6 Processor AMD Phenom™ II X4 Processor AMD Phenom™ II X3 Processor AMD Phenom™ II X2 Processor AMD Athlon™ II X4 Processor AMD Athlon™ II X3 Processor AMD Athlon™ II X2 Processor AMD Sempron™ Processor Maximum CPU TDP (Thermal Design Power) : 125Watt
HT	Support HT 5.2G
MEMORY	Support Dual Channel DDR3 800/1066/1333 MHz 4 x DDR3 DIMM Memory Slot Max. Supports up to 16GB Memory
STORAGE	6 x SATA II Connector 1 x IDE Connector Support SATA RAID: 0,1,10
LAN	Realtek RTL8111DL - 10/100/1000 Controller

AUDIO CODEC	Realtek ALC662 6-Channel HD Audio
USB	4 x USB 2.0 Port 2 x USB 2.0 Header
EXPANSION SLOT	1 x PCI-E 2.0 x16 Slot 2 x PCI-E 2.0 x1 Slot 3 x PCI Slot
REAR I/O	1 x PS/2 Mouse 1 x PS/2 Keyboard 4 x USB 2.0 Port 1 x COM Port 1 x LAN Port 3 x Audio Jacks
INTERNAL I/O	2 x USB 2.0 Header 6 x SATA II Connector (3Gb/s ) 1 x IDE Connector 1 x Floppy Connector 1 x Front Audio Header 1 x Front Panel Header 1 x S/PDIF-Out Header 1 x CPU Fan Connector 1 x System Fan Connector 1 x Printer Port Header
DIMENSION	ATX Form Factor Dimension: 30.5cm X 20.5cm ( W x L )
OS SUPPORT	Supports Windows XP / Vista / 7
ACCESSORIES	2 x SATA Cable 1 x I/O Shield 1 x Fully Setup Driver CD 1 x User Manual
FEATURES	Supports BIO-unlockING Windows 7 Compatible Supports AOD ACC Supports Phenom II x6 Supports AM3 Supports Solid capacitor BIO-FLASHER

## A770E3 OVERVIEW

**\*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!**