


Viotech 3100+ Motherboard

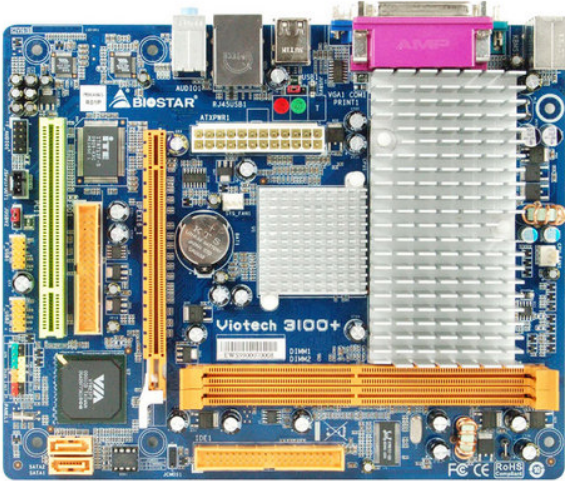

- On board with VIA C7-D 1.6+ GHz
- Supports FSB 800MHz
- VIA Chrome9 HC IGP
- Integrated High Definition audio
- VIA Power Saver Technology
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

Viotech 3100+ Specification

| | |
|------------------|---|
| CPU | VIA C7-D 1.6+ GHz Processor |
| FSB | Support FSB 800MHz |
| MEMORY | Support DDR2 533/667 MHz 2 x DDR2 DIMM Memory Slot Max. Supports up to 2GB Memory |
| INTEGRATED VIDEO | VIA Chrome9 HC IGP, On Board Graphic Max. Memory Share Up to 256MB |
| STORAGE | 2 x SATA II Connector 1 x IDE Connector Support SATA RAID: 0,1 |
| LAN | VIA VT6113 - 10/100 PHY |
| AUDIO CODEC | VIA VT1708B 6-Channel HD Audio |
| USB | 4 x USB 2.0 Port 2 x USB 2.0 Header |
| EXPANSION SLOT | 1 x PCI-E x16 Slot 1 x PCI Slot |

| | |
|--------------|---|
| REAR I/O | <ul style="list-style-type: none"> 1 x PS/2 Mouse 1 x PS/2 Keyboard 4 x USB 2.0 Port 1 x COM Port 1 x Printer Port 1 x VGA Port 1 x LAN Port 3 x Audio Jacks |
| INTERNAL I/O | <ul style="list-style-type: none"> 2 x USB 2.0 Header 2 x SATA II Connector (3Gb/s) 1 x IDE Connector 1 x Floppy Connector 1 x Front Audio Header 1 x Front Panel Header 1 x S/PDIF-Out Header 1 x CPU Fan Connector 1 x System Fan Connector |
| DIMENSION | Micro ATX Form Factor Dimension: 22.3cm X 17.5cm (W x L) |
| OS SUPPORT | Supports Windows XP / Vista / 7 |
| ACCESSORIES | <ul style="list-style-type: none"> 2 x SATA Cable 1 x I/O Shield 1 x Fully Setup Driver CD 1 x User Manual |
| FEATURES | Supports Solid capacitor BIO-FLASHER |

Viotech 3100+ OVERVIEW

***The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!**