


EIB7B-AXI Industrial PC

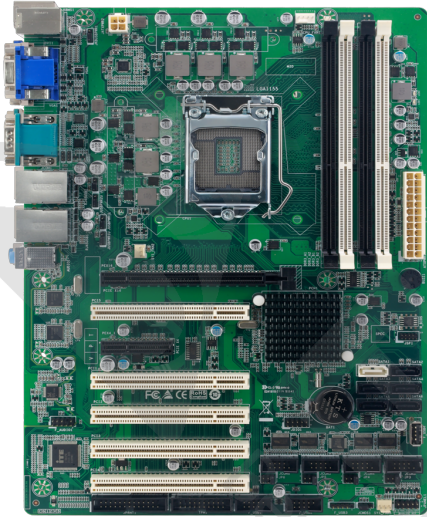

- LGA1155, Supports 3rd Intel Core processor with Intel B75 chipset, TDP: 95W
- Supports display output : VGA/DVI-D
- Support 4 x DDR3 1333/1066 MHz LONG-DIMM, up to 32GB max
- Dual GbE LAN by i211-AT
- 9 x USB2.0 & 2x USB3.2 Gen1
- 4 x RS232, 2 x RS232/422/485
- 5 x SATAII, 1 x SATAIII
- 1 x PCIe x16 slot
- 1 x PCIe x4 slot
- 5 x PCI slot
- Support 0 ~ 60 degree C operating temperature

Specification

| | |
|----------------|--|
| CPU SUPPORT | Socket 1155 for Intel® Core i7 / i5 / i3 / Pentium / Celeron processor |
| CHIPSET | Intel B75 |
| MEMORY | 4 x DDR3L 1333/1066 MHz SO-DIMM |
| EXPANSION SLOT | 1 x PCI-E x16 Slot 5 x PCI 1 x PCI-Ex4 Slot |
| GRAPHICS | 1 x DVI-D, up to 1920 x 1200 @60 Hz 1 x VGA, up to 2048 x 1536 @75Hz |
| AUDIO | Realtek ALC897 HD Audio |
| LAN | 2 x Intel I211-AT GbE LAN |
| SUPER I/O CHIP | ITE IT8625E |
| REAR I/O | 4 x USB 2.0 1 x DVI 1 x D-Sub 2 x LAN 1 x Audio jack Line-in/ Line-out / Mic-in 2 x USB 3.0 2 x RS232/422/485, DB9 connector PS/2 (for Y cable use) |

| | |
|---------------|---|
| INTERNAL I/O | 1 x USB 2.0 Header (support 1 device) 2 x USB 2.0 Header (support 4 devices) 4 x Serial Header for RS232 1 x Front Audio Header Line-out, Mic-in 1 x Front Panel Header 1 x DIO(GPIO) 8 bit (4-In, 4-Out) Header 1 x ATX Power Connector 1 x LPT 1 x TPM 1.2 box-header 1 x CPU PWM-FAN Header 2 x System DC-FAN Header 1 x Buzzer 5 x SATAII 1 x Clear CMOS header 1 x 2*2 pin 12V power connector 1 x HDD power header 1 x SATA 6Gb/s |
| DIMENSION | ATX 305 x 220 mm |
| ENVIRONMENT | Working Temperature 0°C ~ 60°C Relative Humidity 5% ~ 90% |
| CERTIFICATION | CE FCC ROHS |
| OS SUPPORT | Support Windows Win7, Win10, Ubuntu |

*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!



BIOSTAR®
Beyond Better, Racing to the Future.