


## TP35D3-A7 Deluxe Motherboard

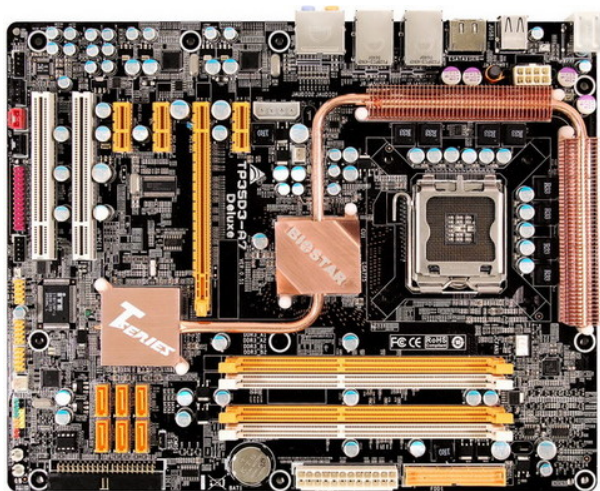

- Socket LGA 775
- Supports Intel Core 2 Quad/Core 2 Duo/Pentium D/Pentium 4/Celeron 400 Series/Celeron D Processor
- Supports FSB 800/1066/1333MHz
- Supports DDR3 667/800/1066/1333MHz
- Native DDR3 1333MHz Support
- Support Intel Hyper-Threading Technology
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

## TP35D3-A7 Deluxe Specification

|             |                                                                                                                                                                                                                                                                                                               |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CPU SUPPORT | Intel® Core™ 2 Extreme Processor<br>Intel® Core™ 2 Quad Processor<br>Intel® Core™ 2 Duo Processor<br>Intel® Pentium® Dual-Core Processor<br>Intel® Pentium® D Processor<br>Intel® Pentium® 4 Processor<br>Intel® Celeron® D Processor<br>Intel® Celeron® Processor 400<br>Sequence<br>Support Intel® 45nm CPU |
| FSB         | Support FSB 800/1066/1333MHz                                                                                                                                                                                                                                                                                  |
| MEMORY      | Support Dual Channel DDR3<br>667/800/1066/1333 MHz<br>4 x DDR3 DIMM Memory Slot<br>Max. Supports up to 8GB Memory<br>※Support DDR3 1333MHz While Using<br>FSB 1333 CPU                                                                                                                                        |
| STORAGE     | 6 x SATA II Connector<br>1 x eSATA II Connector by Marvell<br>88SE6121<br>1 x IDE Connector by Marvell 88SE6121<br>Support SATA RAID: 0,1,0+1,5                                                                                                                                                               |

|                |                                                                                                                                                                                                                                                                                                                                    |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LAN            | 2 x Marvell 88E8056 - 10/100/1000 Controller                                                                                                                                                                                                                                                                                       |
| AUDIO CODEC    | Realtek ALC888 8+2 Channel HD Audio                                                                                                                                                                                                                                                                                                |
| USB            | 6 x USB 2.0 Port<br>3 x USB 2.0 Header                                                                                                                                                                                                                                                                                             |
| EXPANSION SLOT | 1 x PCI-E x16 Slot<br>3 x PCI-E x1 Slot<br>2 x PCI Slot                                                                                                                                                                                                                                                                            |
| REAR I/O       | 1 x PS/2 Mouse<br>1 x PS/2 Keyboard<br>2 x eSATA2 Connector<br>6 x USB 2.0 Port<br>2 x LAN Port<br>6 x Audio Jacks                                                                                                                                                                                                                 |
| INTERNAL I/O   | 3 x USB 2.0 Header<br>6 x SATA II Connector (3Gb/s )<br>1 x IDE Connector by Marvell 88SE6121<br>1 x Front Audio Header<br>1 x CD-IN Header<br>1 x S/PDIF-IN Header<br>1 x S/PDIF-Out Header<br>1 x CPU Fan Connector<br>1 x North Bridge FAN Header<br>1 x System Fan Connector<br>1 x COM Port Header<br>1 x Printer Port Header |
| DIMENSION      | ATX Form Factor Dimension: 24.4cm X 30.5cm ( W x L )                                                                                                                                                                                                                                                                               |
| OS SUPPORT     | Supports Windows 2000 / XP / Vista                                                                                                                                                                                                                                                                                                 |
| ACCESSORIES    | 1 x IDE Cable<br>1 x FDD Cable<br>6 x SATA Cable<br>6 x SATA Power Cable<br>1 x S/PDIF Cable<br>1 x I/O Shield<br>1 x Fully Setup Driver CD<br>1 x User Manual                                                                                                                                                                     |

## FEATURES

Supports 100% Solid capacitor  
Tweak Tech  
Supports 8-Phase Power  
Supports Clean-Tone  
Supports O.N.E  
Supports C.R.P  
Supports S.R.S  
Supports M.I.T  
Supports T-Power  
Supports Rapid Switch  
Supports Rapid Debug

## TP35D3-A7 Deluxe OVERVIEW

\*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!