


## P4TDG Motherboard

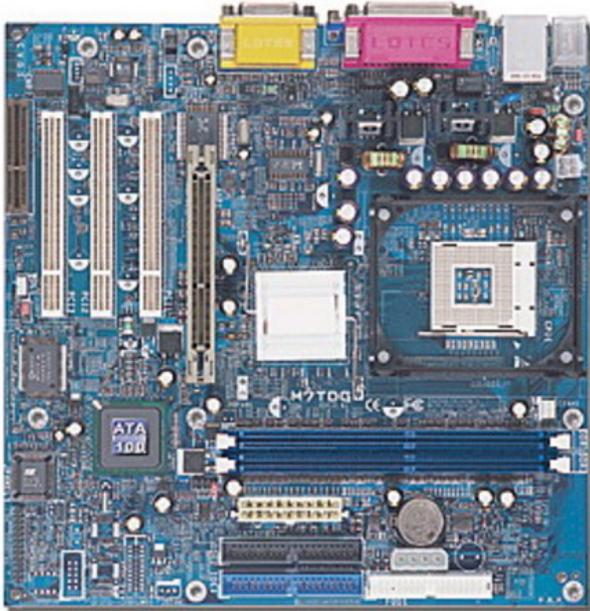

- 
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

## P4TDG Specification

FSB	Support FSB 533MHz
MEMORY	Support DDR 266 MHz 2 x DDR DIMM Memory Slot Max. Supports up to 2GB Memory
INTEGRATED VIDEO	Intel Extreme Graphics 2 , On Board Graphic Max. Share Memory Up To 64MB
STORAGE	4 x IDE Connector
AUDIO CODEC	2.2 6-Channel AC97 Audio
USB	2 x USB 2.0 Port 2 x USB 2.0 Header
EXPANSION SLOT	3 x PCI Slot 1 x AMR Slots 1 x CNR Slots 1 x AGP X Slot

REAR I/O	1 x PS/2 Mouse 1 x PS/2 Keyboard 2 x USB 2.0 Port 1 x COM Port 1 x Printer Port 1 x VGA Port 3 x Audio Jacks
INTERNAL I/O	2 x USB 2.0 Header 1 x Floppy Connector 1 x IrDA Header 1 x Front Audio Header
DIMENSION	Micro ATX Form Factor Dimension: 24.4cm X 24.4cm ( W x L )

## P4TDG OVERVIEW

\*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!

BIOS