


U8868 Motherboard

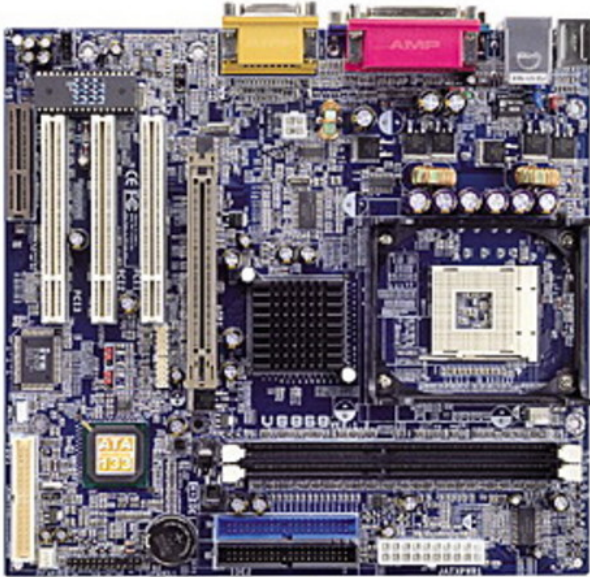

- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

U8868 Specification

FSB	Support FSB 400MHz
MEMORY	Support DDR 266 MHz 2 x DDR DIMM Memory Slot Max. Supports up to 2GB Memory
INTEGRATED VIDEO	VIA S3 ProSavage, On Board Graphic Max. Memory Share Up to 32MB
STORAGE	4 x IDE Connector
LAN	VIA VT6103 - 10/100 PHY
AUDIO CODEC	2.2 6-Channel AC97 Audio
USB	2 x USB 2.0 Port 2 x USB 2.0 Header
EXPANSION SLOT	3 x PCI Slot 1 x CNR Slots 1 x AGP X Slot

REAR I/O	<ul style="list-style-type: none"> 1 x PS/2 Mouse 1 x PS/2 Keyboard 2 x USB 2.0 Port 1 x COM Port 1 x Printer Port 1 x VGA Port 1 x LAN Port 3 x Audio Jacks
INTERNAL I/O	<ul style="list-style-type: none"> 2 x USB 2.0 Header 4 x IDE Connector 1 x Floppy Connector 1 x IrDA Header 1 x Front Audio Header 1 x CD-IN Header
DIMENSION	Micro ATX Form Factor Dimension: 22.9cm X 24.4cm (W x L)

U8868 OVERVIEW

*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!

BIOSTAR