


TA770 A2+ SE Motherboard

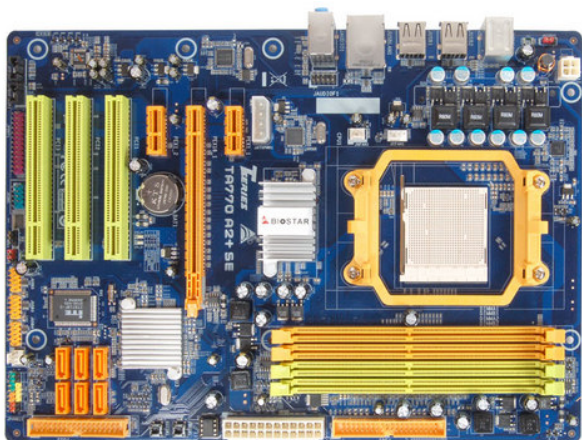

- Supported Socket AM3 processors AMD Phenom II X4 / Phenom II X3 / Phenom II X2 processor
- Support latest AMD Phenom X4 , X3 / Athlon /Sempron processors
- Support HT3.0
- Hyper Transport Technology up to 5.2G
- Supports AMD Cool'n'Quiet Technology
- Supports BIO-Remote 2 Technology
- Supports Charger Booster Technology

TA770 A2+ SE Specifcation

CPU SUPPORT	AMD Phenom™ II X4 Processor AMD Phenom™ II X3 Processor AMD Phenom™ II X2 Processor AMD Phenom™ X4 Processor AMD Phenom™ X3 Processor AMD Athlon™ II X2 Processor AMD Athlon™ X2 Dual-Core Processor AMD Athlon™ 64 X2 Dual-Core Processor AMD Athlon™ 64 FX Processor AMD Athlon™ 64 Processor AMD Sempron™ Processor
HT	Support HT 5.2G
MEMORY	Support Dual Channel DDR2 533/667/800/1066(1066 by AM2+ CPU) MHz 4 x DDR2 DIMM Memory Slot Max. Supports up to 16GB Memory ※It is recommended to use those Validated DDR2-1066 modules suggested by AMD
STORAGE	6 x SATA II Connector 1 x IDE Connector Support SATA RAID: 0,1,10

LAN	Realtek RTL8111C - 10/100/1000 Controller
AUDIO CODEC	Realtek ALC662 6-Channel HD Audio
USB	6 x USB 2.0 Port 3 x USB 2.0 Header
EXPANSION SLOT	1 x PCI-E 2.0 x16 Slot 2 x PCI-E 2.0 x1 Slot 3 x PCI Slot
REAR I/O	1 x PS/2 Mouse 1 x PS/2 Keyboard 6 x USB 2.0 Port 1 x LAN Port 3 x Audio Jacks
INTERNAL I/O	3 x USB 2.0 Header 6 x SATA II Connector (3Gb/s) 1 x IDE Connector 1 x Floppy Connector 1 x Front Audio Header 1 x Front Panel Header 1 x CD-IN Header 1 x S/PDIF-Out Header 1 x CPU Fan Connector 2 x System Fan Connector 1 x COM Port Header 1 x Printer Port Header
DIMENSION	ATX Form Factor Dimension: 30.5cm X 22.5cm (W x L)
OS SUPPORT	Supports Windows XP / Vista
ACCESSORIES	1 x IDE Cable 2 x SATA Cable 1 x SATA Power Cable 1 x I/O Shield 1 x Fully Setup Driver CD 1 x User Manual
FEATURES	Supports AM3/AM2+ Supports Solid capacitor Tweak Tech Supports Fanless Supports Clean-Tone Supports O.N.E Supports C.R.P Supports S.R.S Supports M.I.T Supports Rapid Switch Supports Rapid Debug

TA770 A2+ SE OVERVIEW

*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!

BIOSTAR