


TA770E3 Motherboard

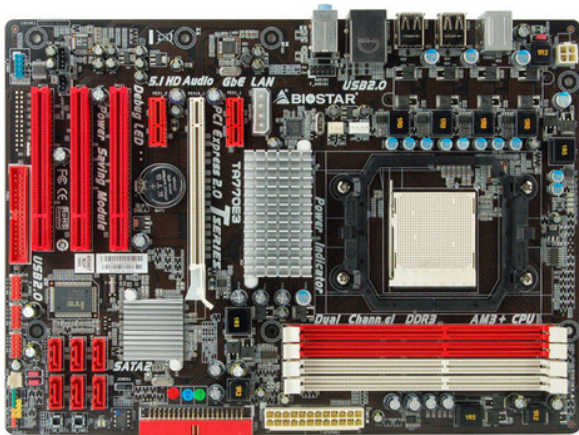

- Supported Socket AM3 processors AMD Phenom II / Athlon II processor
- AMD 125W processor support
- AMD 770 Chipset
- Dual-Channel DDR3 - 1600(OC)/1333/1066/800
- AMD OverDrive Utility Support

TA770E3 Specification

CPU SUPPORT	AMD Phenom™ II X6 Processor AMD Phenom™ II X4 Processor AMD Phenom™ II X3 Processor AMD Phenom™ II X2 Processor AMD Athlon™ II X4 Processor AMD Athlon™ II X3 Processor AMD Athlon™ II X2 Processor Maximum CPU TDP (Thermal Design Power) : 125Watt
HT	Support HT 5.2G
MEMORY	Support Dual Channel DDR3 800/1066/1333/1600(OC) MHz 4 x DDR3 DIMM Memory Slot Max. Supports up to 16GB Memory
STORAGE	6 x SATA II Connector 1 x IDE Connector Support SATA RAID: 0,1,10
LAN	Realtek RTL8111DL - 10/100/1000 Controller
AUDIO CODEC	Realtek ALC662 6-Channel HD Audio
USB	6 x USB 2.0 Port 3 x USB 2.0 Header
EXPANSION SLOT	1 x PCI-E 2.0 x16 Slot 2 x PCI-E 2.0 x1 Slot 3 x PCI Slot

REAR I/O	<ul style="list-style-type: none"> 1 x PS/2 Mouse 1 x PS/2 Keyboard 6 x USB 2.0 Port 1 x LAN Port 3 x Audio Jacks
INTERNAL I/O	<ul style="list-style-type: none"> 3 x USB 2.0 Header 6 x SATA II Connector (3Gb/s) 1 x IDE Connector 1 x Floppy Connector 1 x Front Audio Header 1 x Front Panel Header 1 x CD-IN Header 1 x S/PDIF-Out Header 1 x CPU Fan Connector 2 x System Fan Connector 1 x COM Port Header
DIMENSION	ATX Form Factor Dimension: 30.5cm X 22cm (W x L)
OS SUPPORT	Supports Windows XP / Vista / 7
ACCESSORIES	<ul style="list-style-type: none"> 1 x IDE Cable 2 x SATA Cable 1 x SATA Power Cable 1 x I/O Shield 1 x Fully Setup Driver CD 1 x User Manual
FEATURES	<ul style="list-style-type: none"> Supports BIO-unlockING Windows 7 Compatible Supports Phenom II x6 Supports AM3 Supports Solid capacitor Supports Fanless Supports Clean-Tone Supports O.N.E Supports Rapid Switch Supports Rapid Debug BIO-FLASHER Supports Toverclocker OC software Supports GPU

TA770E3 OVERVIEW

*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!